



NOTICE: This drawing is subject to change.
 Current version is available at www.saami.org.

MAXIMUM CARTRIDGE / MINIMUM CHAMBER

243 WINCHESTER

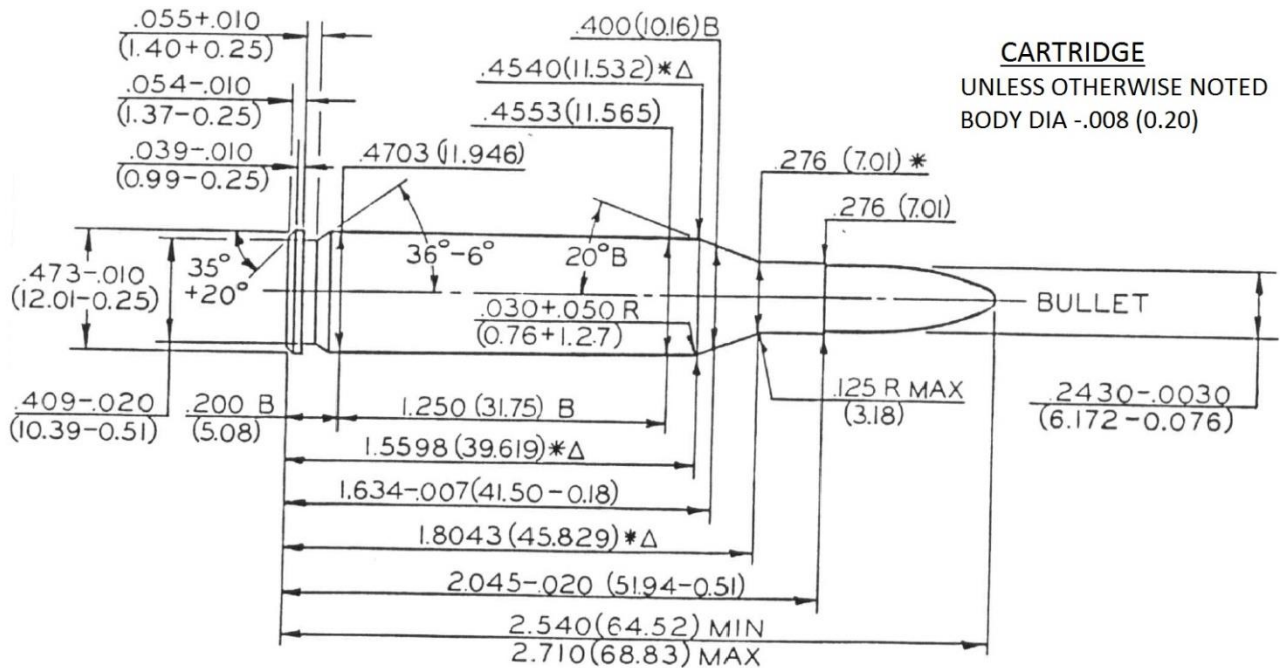

CARTRIDGE
 UNLESS OTHERWISE NOTED
 BODY DIA -.008 (0.20)

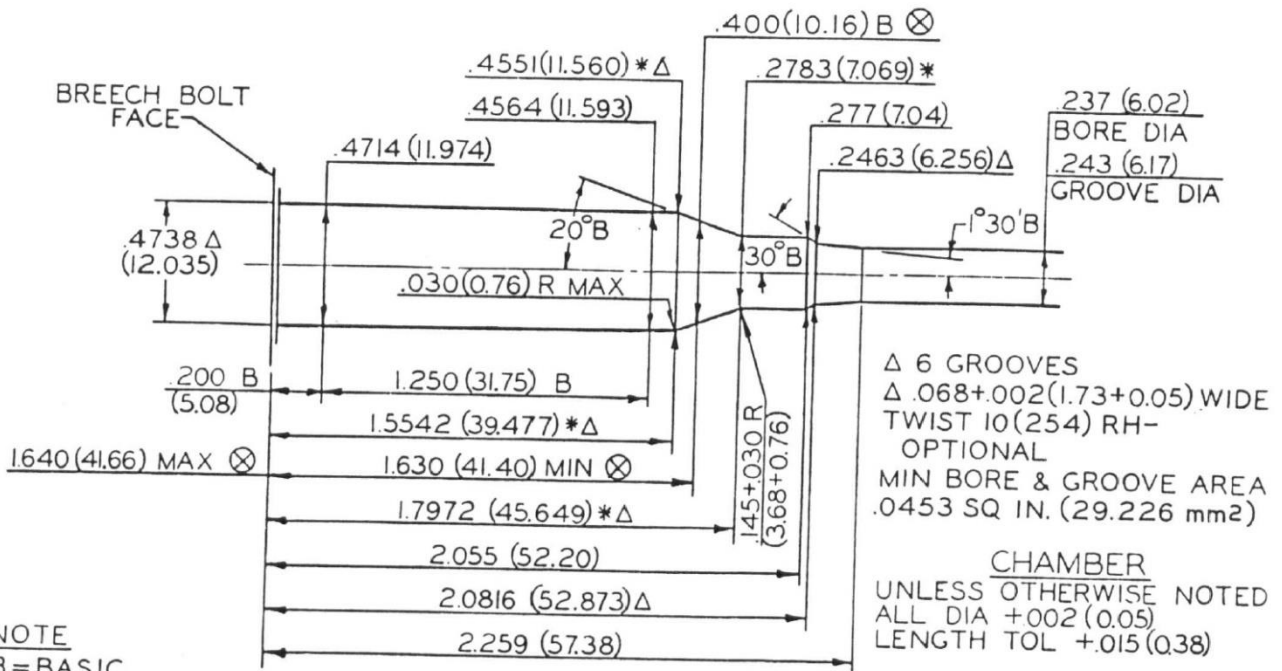

Δ 6 GROOVES
 Δ .068 + .002 (1.73 + 0.05) WIDE
 TWIST 10 (254) RH-
 OPTIONAL
 MIN BORE & GROOVE AREA
 .0453 SQ IN. (29.226 mm²)

CHAMBER
 UNLESS OTHERWISE NOTED
 ALL DIA +.002 (0.05)
 LENGTH TOL +.015 (0.38)

NOTE

B=BASIC

(XX.XX)=MILLIMETERS

⊗ = HEADSPACE DIMENSION

* DIMENSIONS ARE TO INTERSECTION OF LINES.

Δ = REFERENCE DIMENSION

ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)