
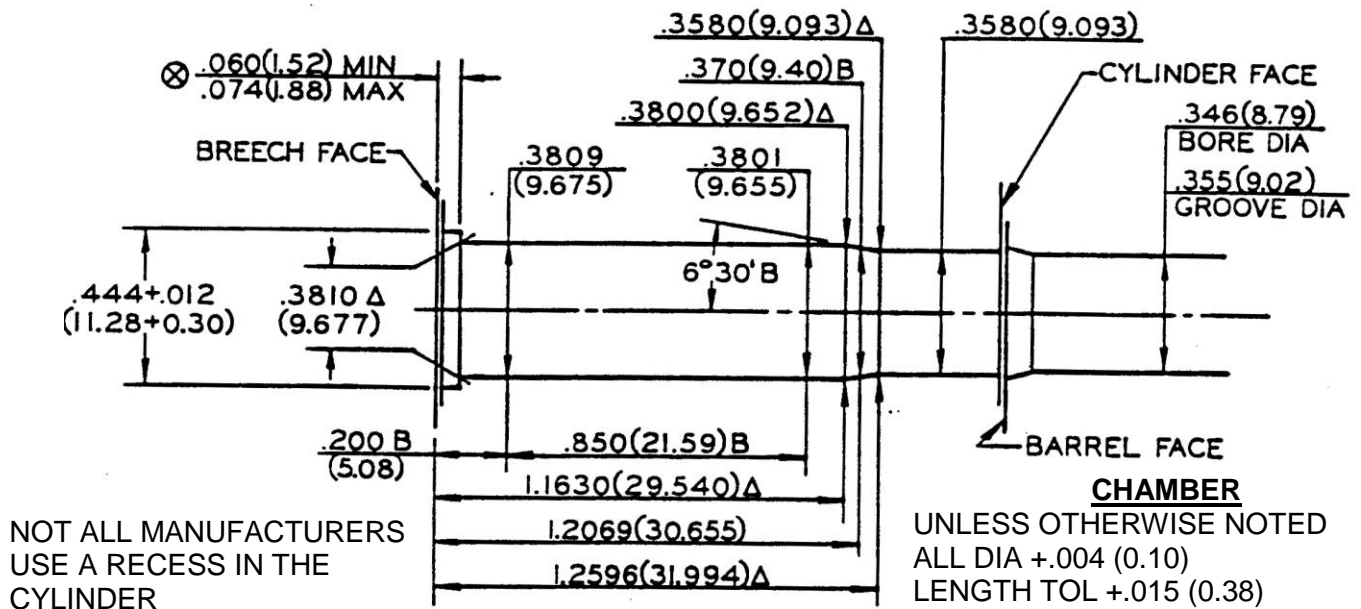


NOTICE: This drawing is subject to change.
 Current version is available at www.saami.org.

MAXIMUM CARTRIDGE / MINIMUM CHAMBER

38 SPECIAL / 38 SPECIAL +P

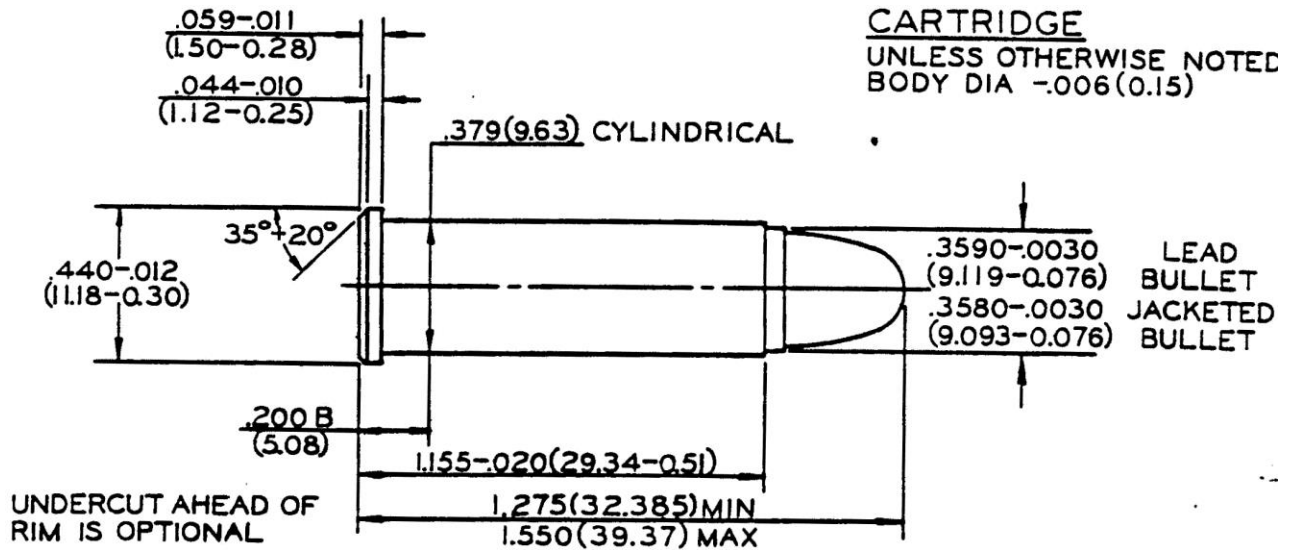

Δ 6 GROOVES
 $\Delta .105+.002$ (2.67+0.05) WIDE
 TWIST 18.75 (476.3) RH – OPTIONAL
 MIN. BORE & GROOVE AREA:
 $.0969 \text{ IN}^2$ (62.516 mm^2)

NOTE

B = BASIC

Δ = REFERENCE DIMENSION

\otimes = HEADSPACE DIMENSION

(XX.XX) = MILLIMETERS

* = DIMENSIONS TO INTERSECTIONS OF LINES

ALL CALCULATIONS APPLY AT MAXIMUM MATERIAL CONDITION (MMC)